


**A. Sedan**

**Removal**

---

- 1 Remove door liner (72–100).
- 2 Remove plastic sheet.
- 3 Take front and rear locks off of lift arms.
- 4 Wind up window and hold with a wedge.
- 5 Pull window lift arm off of window lift rail.

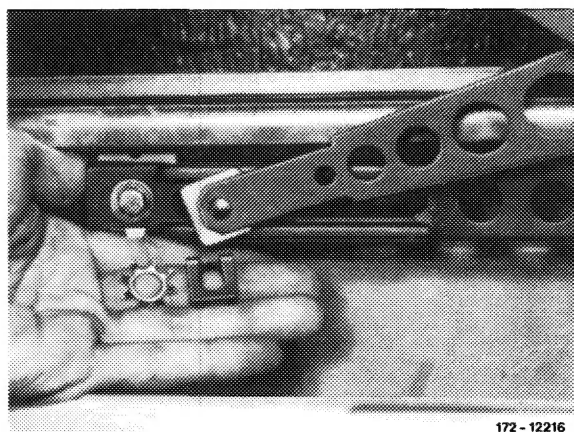


- 6 Unscrew bolts and remove window lift.

**Installation**

---

- 7 Install in reverse sequence.

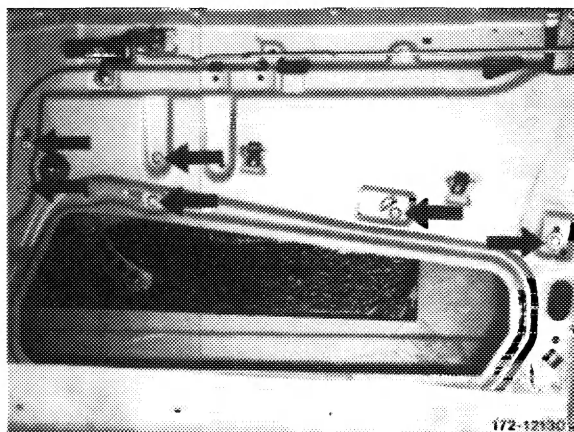

**B. Coupe**


**Remove**

---


- 1 Remove door cover (72–100, section B).
- 2 Remove plastic foil.

3 Unscrew screws at the window lifting rail.

4 Push crank window upwards and jam into position with a wedge.

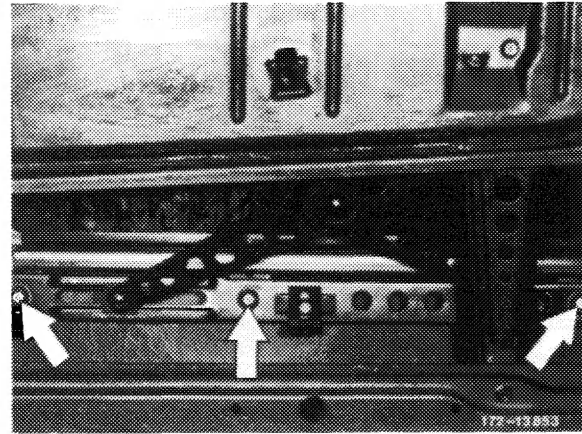

5 Unscrew screws at door inner panel.

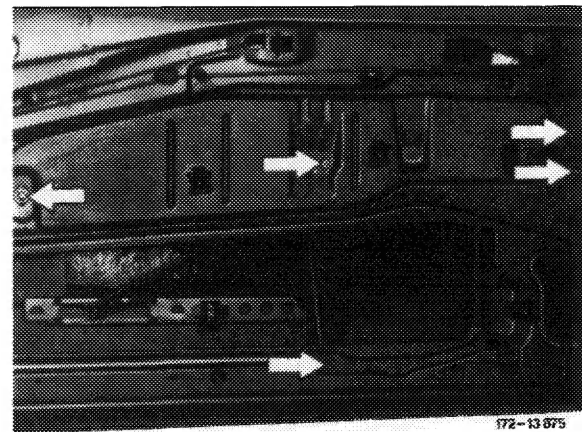

6 Remove window lifter via access opening.

#### Install

---

7 Installation takes place in reverse order.

**Note:** If the door foil is damaged during removal, it must be renewed and carefully attached with adhesive. This foil serves to seal against water and dust.

